



TYPICAL MULTILANE SECTION (SURFACED MEDIAN)

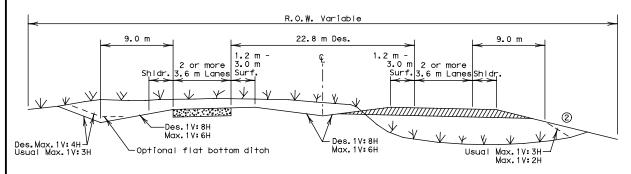

TYPICAL MULTILANE SECTION (DEPRESSED MEDIAN)

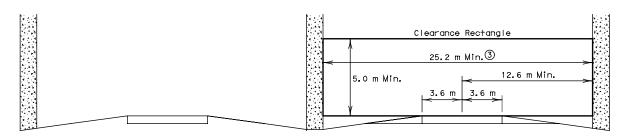

CLEARANCE REQUIREMENTS MULTILANE HIGHWAY

- ① Medians full pavement structure.
- ② For side slope rates, see Chapter 2, Slopes and Ditches.
- ③ Where future lanes are anticipated, add 3.6 m to width of clearance rectangle for each added lane.

Cross Sections for Multi-Lane Rural Highways (Metric)